

Uvitem

Ultravioleta, Tecnología
y Maquinaria, S.L.

Dispersers with pneumatic lifting

Uvitem has included in the production line a new wide range of dispersers with **pneumatic lifting** system and a variety power ratings.



Pneumatic lifting

CE ATEX

**Our costs
reduction
make
our prices
very
competitive**

Power:
5'5 HP - 7'5 HP - 10 HP.

Electronic speed
variation.

Clamping system
for tanks.

Safe clamping and
lifting by means of
limit switch.


Speed range:
From 0 to 1.500 RPM.

Uvitem produces a wide wide range of agitators with pneumatic lifting integrating the newest technology innovations.

The easy operation and the innovative design allow the maximum reduction of safety risks.

The lower sound pressure level eases the work of operators and reduces tiredness.

It is aesthetically and functionally better designed, which provides a greater customer satisfaction.

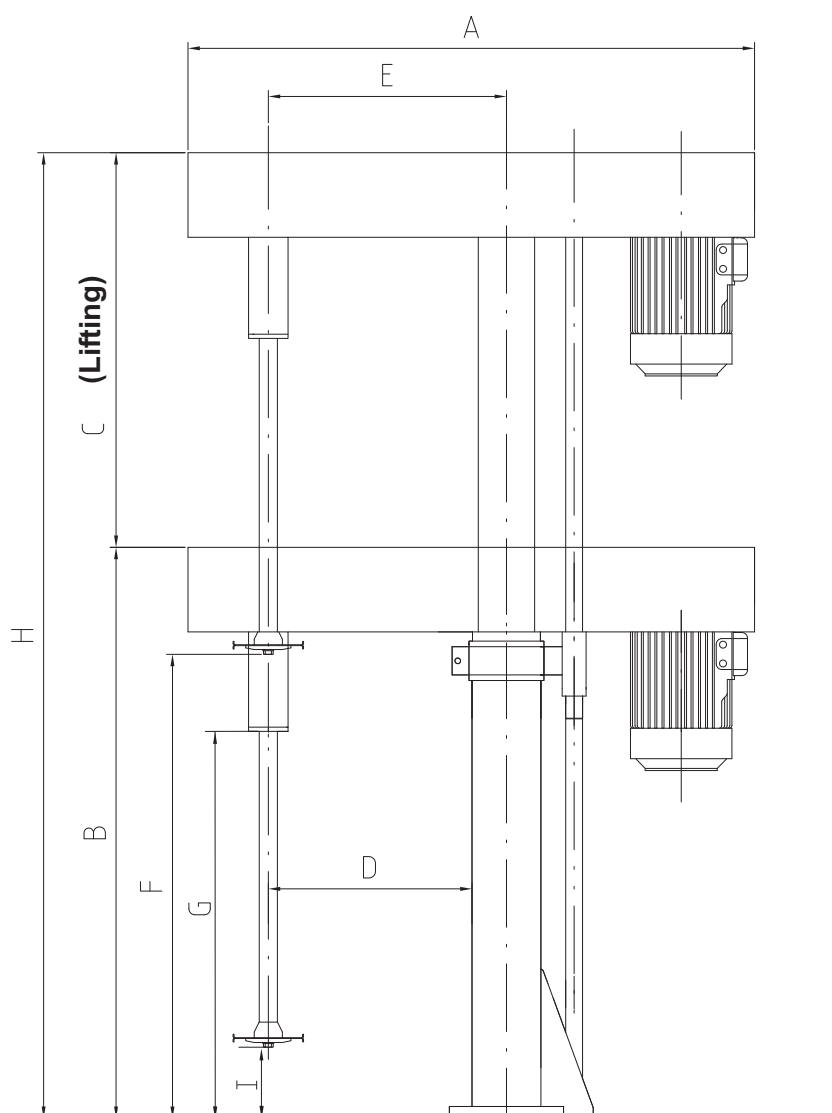

Indicator IP-55



Indicator EExd

Technical Specifications

Model	Power HP	Speed RPM
D0-1	5'5	1.500
D0-2	7'5	1.500
D0-3	10	1.500

Dimension of Agitators

A	B	C	D	E	F	G	H	I
1.407	1.610	1.000	520	650	1.210	1.180	2.610	210